

enbio®

Unwrapped
FAST / 134°C


7 min

Wrapped
Class B / 134°C

15 min

Wrapped
Class B / 121°C

30 min

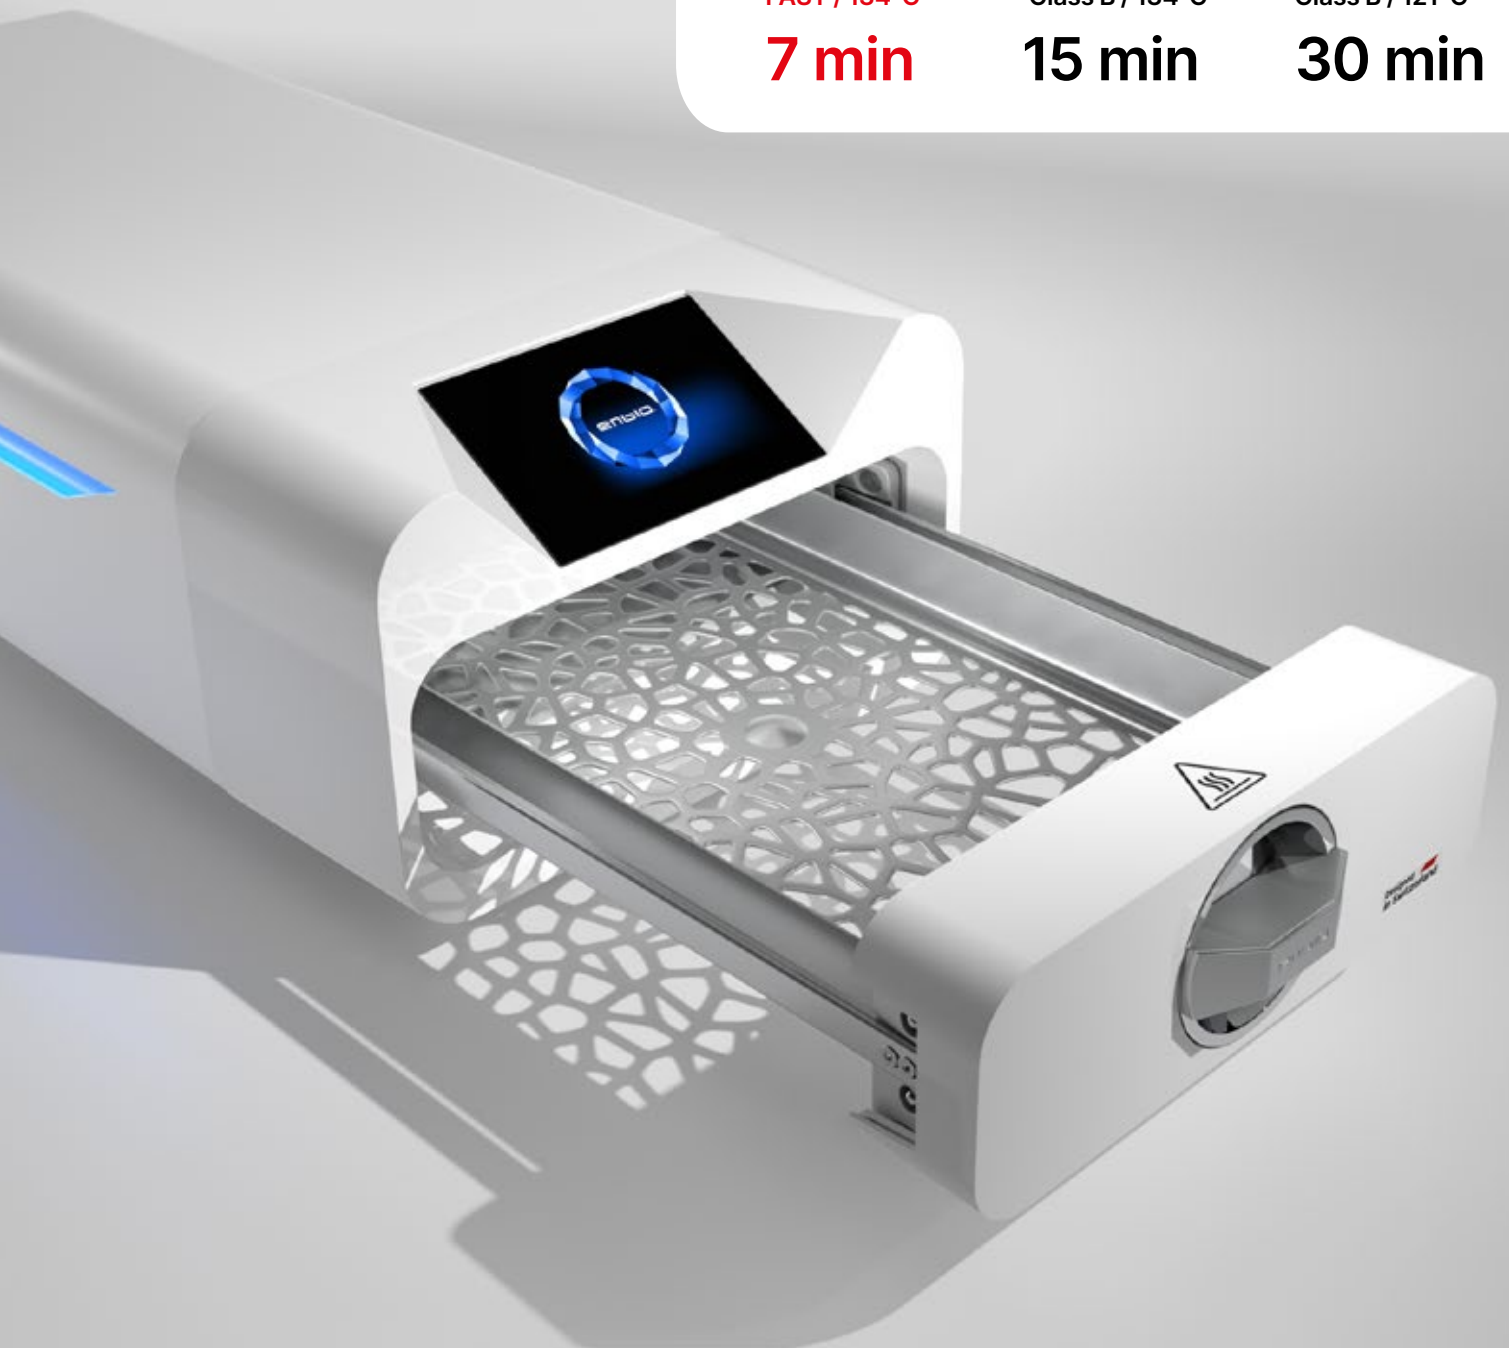


Enbio S Autoclave Technical Data

Designed
in Switzerland

Capacity



x8

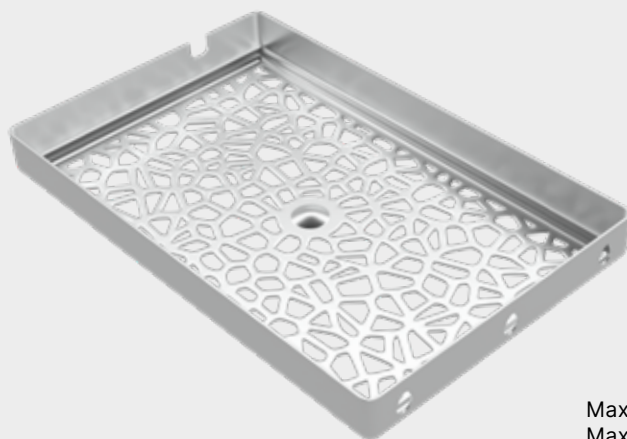

Load space
28×18×3,5 cm

Max. packages amount (circa) **8**
Max. recommended batch weight **0,5 kg**
Process chamber volume **2,7 l**




Power supply

Enbio works with any typical electrical outlet.



Data archiving

All process data are automatically written to a USB disk.



Water supply

Enbio uses distilled water from external tank. With Enbio Magic Filter, water can be recycled.



Process reports

Enbio Data Viewer (included) allows generating and printing detailed process reports from the data on USB.

Dimensions



56 cm



25 cm

15 cm

Pressure & temperature

Working pressure **2,1 Bar**
Max. pressure **2,3 Bar**
Max. process temperature **137°C**

Electrical

Power supply **230V/50Hz**
Power **2,25 kW**
Max. current consumption **10 A**

Misc.

Ingress protection **IP20**
Data archiving **USB**
Water conductivity* **< 15 µS/cm**

* - demineralized water only



Enbio Group AG
Eichengasse 3, 4702 Oensingen
Switzerland

enbio.com